


ADVR-12

Universal Hybrid Analog-Digital Three Phase 12Amp Shunt, Auxiliary Winding or PMG Automatic Voltage Regulator

Compatible with Basler AVC63-12, AVC125-10, CATERPILLAR VR6, Kato K65-12B & K125-10B, Leroy Somer 202-8634 regulators

Features

- 1 or 3 phase sensing input & power input
- Voltage regulation less than +/-0.5%
- 220/380/440/480 Vac programmable input
- DIP switch selectable 50/60 Hz
- Multiple excitation system compatibility: SHUNT, AUX, PMG
- Inverse-time over excitation protection
- Under frequency protection and soft start voltage ramping
- EMI suppression
- Built-in high capacity protection fuse
- Apply with KUTAI [IVT-1260/IVT-2460](#) to exceeds normal generator motor starting capabilities
- Digital circuit for voltage sensing and under frequency protection
- Effectively minimize the output voltage variations and under frequency knee point drifted affected by temperature changes

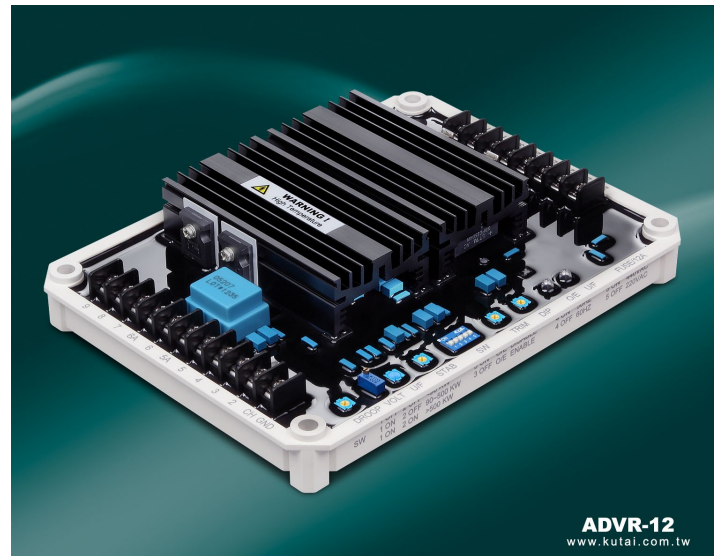


ADVR-12
www.kutai.com.tw

Specifications

Sensing Input	Voltage 180 to 520 Vac 1 or 3 phase selectable	EMI Suppression	Internal electromagnetic interference filtering
	Frequency 50/60 Hz selectable	Over Excitation Protection	Inverse-time 125+/-5 Vdc
Power Input	Voltage 60 to 300 Vac 1 or 3 phase		@ power input 220 Vac
	Frequency 50 to 500 Hz	Ext. Volts Adjustment	+/-5% @ 10K ohms 1 watt potentiometer
Output	Voltage Max. 125 Vdc @ power input 220 Vac	Soft Start Ramp Time	4 seconds +/-10%
	Current Continuous 12A Intermittent 25A for 10 secs.	Voltage Thermal Drift	Less than 3% at temperature range
	Resistance \geq 5 ohms @ power input 110 Vac		-40 to +70 °C
	\geq 11 ohms @ power input 220 Vac	Analog Input	Un 0 to 10% @ 0 to 10 Vdc or +/-0.5 Vdc
Burdens in Shunt & PMG Wiring	1320 VA @ power input 110 Vac	Quadrature Droop Input	CT 1A/5A Max. +/-5% @ P.F +/-0.7
	2640 VA @ power input 220 Vac	Under Frequency Protection (Factory Presets)	
Voltage Regulation	Less than +/-0.5% (with 4% engine governing)		50 Hz system presets knee point at 45 Hz
Build Up Voltage	6 Vac 25 Hz residual volts at power input terminal		60 Hz system presets knee point at 55 Hz
Static Power Dissipation	Max. 12 watts		(-40 to +70°C deviation 0.1 Hz)

Dimensions

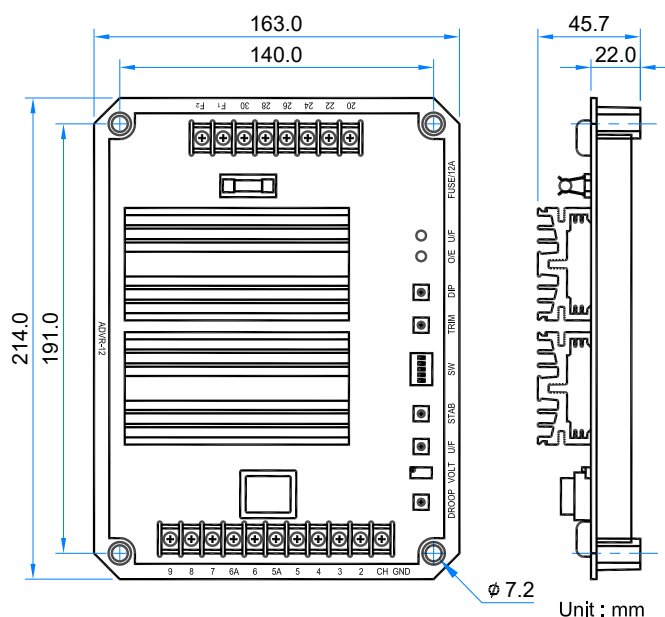

AVR Control Functions

VOLT	Voltage adjustment
STAB	Stability adjustment
U/F	Setting under frequency protection knee point
DROOP	Current compensation droop adjustment
TRIM	Analogue input adjustment
DIP	Voltage droop ratio setting

Indication LED

O/E LED	Over excitation protection indicator
U/F LED	Under frequency protection indicator

Environment

Operating Temperature	-40 to +70 °C
Storage Temperature	-40 to +85 °C
Relative Humidity	Max. 95%
Vibration	3.0 Gs @ 100 to 2K Hz

Physical Specifications

Dimensions	214.0 (L) x 163.0 (W) x 45.7 (H) mm
Weight	1130 g +/-2%

*All manufacturer names and numbers are used for reference purpose only and do not imply that any part is the product of these manufacturer.



KUTAI ELECTRONICS INDUSTRY CO., LTD.

TEL : +886-7-8121771 FAX : +886-7-8121775 Website : www.kutai.com.tw
Headquarters : No.3, Ln. 201, Qianfu St., Qianzhen Dist., Kaohsiung City 806037, Taiwan

