

BTS3BE0250


BTS4BE0250

MCCB Type Transfer Switch

Rated Voltage 100 to 600 Vac Rated Current 250Amp

Features

- High short circuit breaking capacity
- Incorporate OCPD design ^{*1}
- Complies with IEC60947-6-1 requirements ^{*2}
- MCCB has auxiliary limit switch inside
- Reliable motor-operated transfer mechanism
- Molded insulating manual handle
- PVC-coated bus bar insulation
- With mechanical interlock
- Includes plug-in connector, for simple hook-up to controller
- Optional service maintenance key lock device

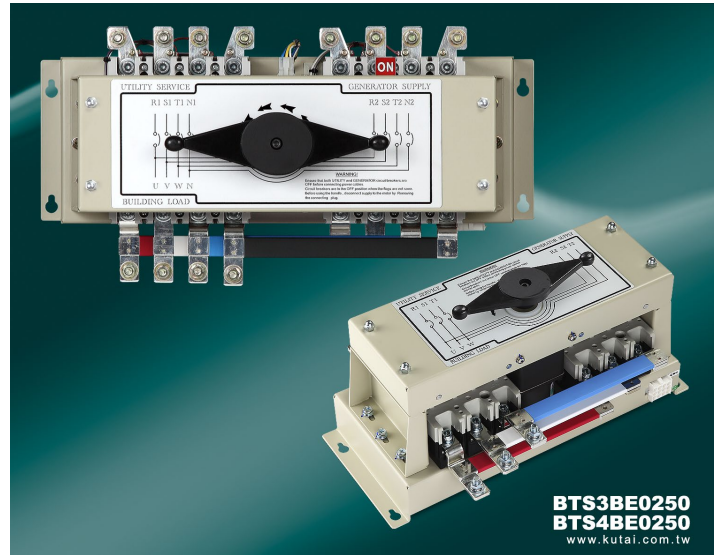

BTS3BE0250
BTS4BE0250
www.kutai.com.tw


*Customized BTS Available : Please provide the required specification and specified MCCB type (if there is any), we will evaluate the mechanical capability for customers.

BTS Rated Operating Current & AC Rated Breaking Capacity

Type	Poles	Rated Current (A) Ambient Temperature 40 °C	AC Rated Breaking Capacity (KA)					Weight (Kg)
			IEC 60947-2 Icu / Ics					
			240V	380V	415V	440V	500V	
BTS3BE0250	3P	250	50 / 25	30 / 15	30 / 15	25 / 13	20 / 10	11
BTS4BE0250	4P	250	50 / 25	30 / 15	30 / 15	25 / 13	20 / 10	13.5

*All dimensions and weights shown are approximate for reference only. For special high breaking capacity requirements, please contact us.

Dimensions

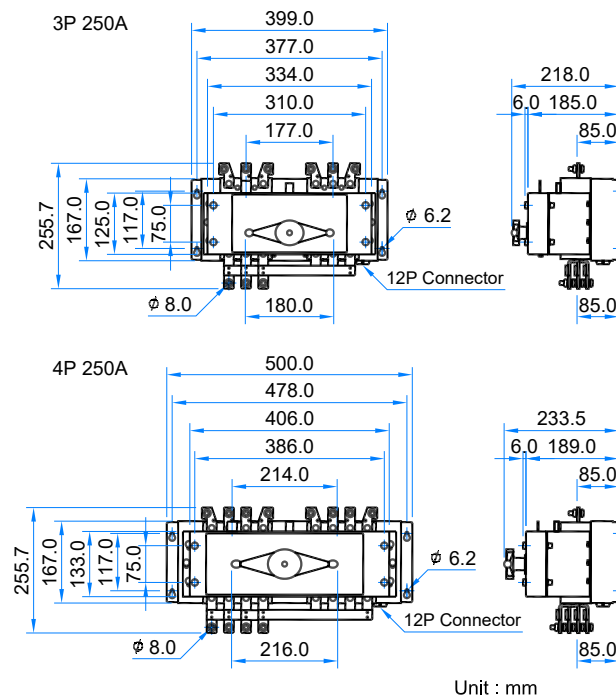

*1 OCPD: Over current protection device.

*2 IEC60947-6-1 Requirements:

- (1) IEC60947-6-1 Class CB: ATS provided with over current releases and the main contacts of which are capable of making and are intended for breaking short circuit currents.
- (2) IEC60947-6-1 Utilization Category AC-33A:
 - Frequent operations.
 - Motor loads or mixed loads including motors, resistive loads and up to 30% incandescent lamp.



KUTAI ELECTRONICS INDUSTRY CO., LTD.

TEL : +886-7-8121771 FAX : +886-7-8121775 Website : www.kutai.com.tw
Headquarters : No.3, Ln. 201, Qianfu St., Qianzhen Dist., Kaohsiung City 806037, Taiwan

