

EP200

Paralleling Module

C.T Input N:5A or N:1A

Features


- Single phase reactive factor compose 50/60 Hz
- Low power dissipation Max. 1 VA
- Current Transformer (C.T.) input N:5A or N:1A
- Together with external, parallel current transformer provides droop signal
- Works with different models of KUTAI AVR



Specifications

C.T Input	N:5A or N:1A	Output Impedance	0 to 200 Ω
Power Dissipation	Max. 1 VA	Applicable AVR Models	EA04A, EA04C, ADVR-054, EA460, EA63-2.5, EA63-2.5S
Droop Voltage	C.T 50% Current 13% (0 P.F) C.T 100% Current 26% (0 P.F)		

Dimensions

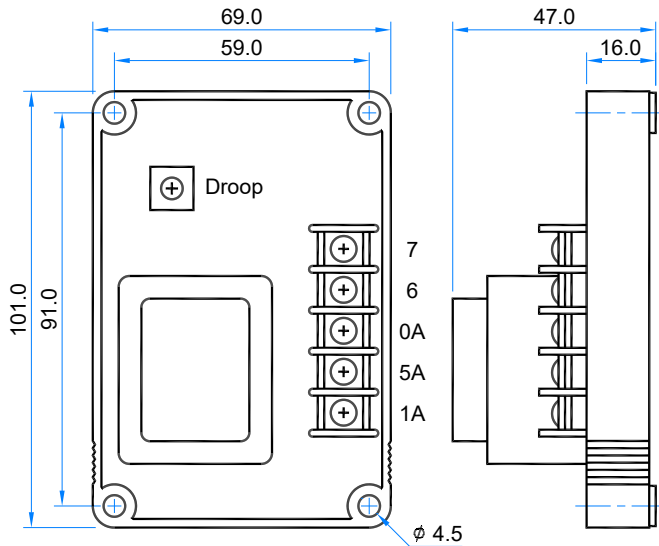

Unit : mm

Environment

Operating Temperature	-40 to +60 $^{\circ}\text{C}$
Storage Temperature	-65 to +85 $^{\circ}\text{C}$

Physical Specifications

Dimensions	101.0 (L) x 69.0 (W) x 47.0 (H) mm
Weight	255 g +/-2%

