

EB500

1 Shot Auto Flash Module

Generator Voltage Build Up Latching Relay


Specifications

Input Voltage	DC 11 to 30 Vdc
Sensing Voltage	AC 120/240 Vac
	Frequency 20 to 500 Hz
Flash Time	1 to 8 seconds (adjustable)
Trigger Contact	Oil pressure or fuel sensor
Resistance	0, 5, 10, 15 ohms select by jumper
Protection	Reverse current protection
Dimensions	107.0 (L) x 75.0 (W) x 44.0 (H) mm
Weight	210 g +/-2%



EB500
www.kutai.com.tw

Dimensions & Wiring Diagram

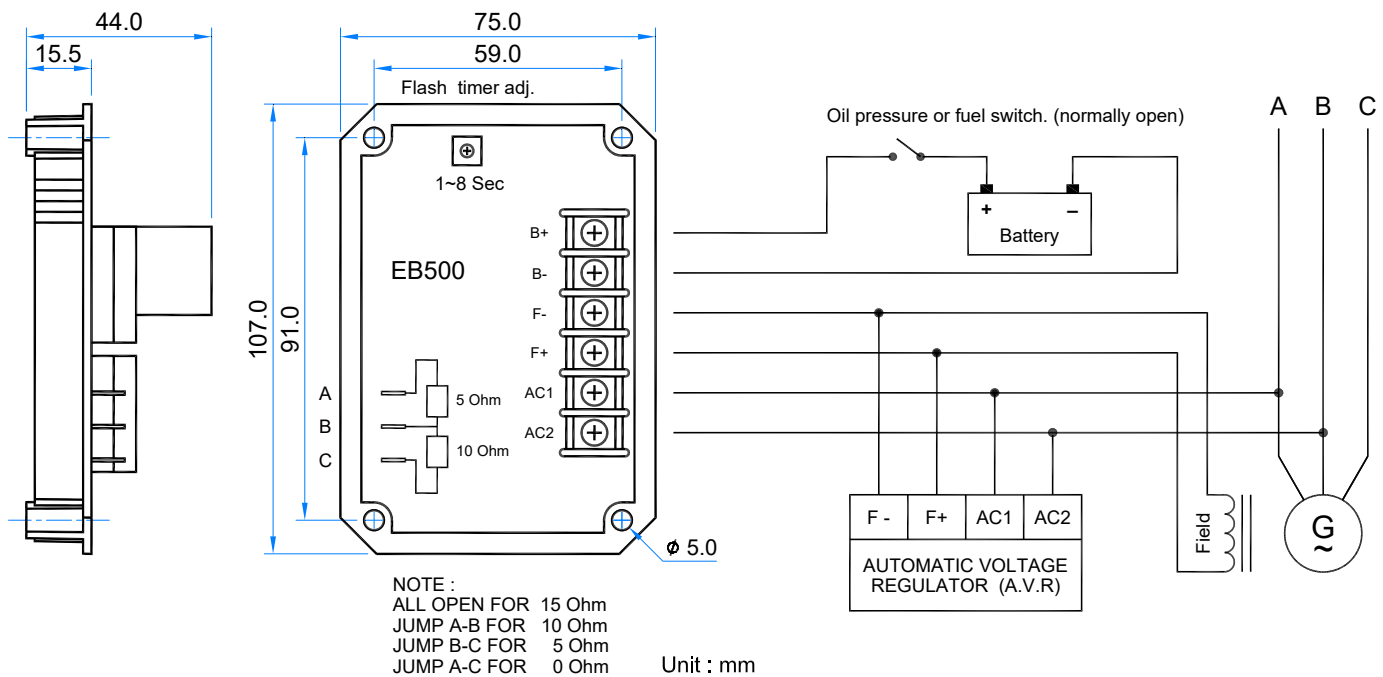

Notice: EB500 is not suitable for use with generators that have a directly grounded N phase.

Short-circuiting will occur when the EB500 is activated (due to battery common ground).