


**ECU-11** (for 12 Vdc System)

**ECU-22** (for 24 Vdc System)

**ECU-02 Output Generator-Set Controller Relay Board**

**Features**

- Isolates ECU-02 From Electric Shock
- Provides Control Signals to Gen-set
- Simplify Genset Control Panel Assembly With Simple Harness\*<sup>1</sup> With Plug-In Connectors
- Euro Standard Terminals with DIN Rail Base
- Simple Maintenance
- External High Capacity Relay Applicable

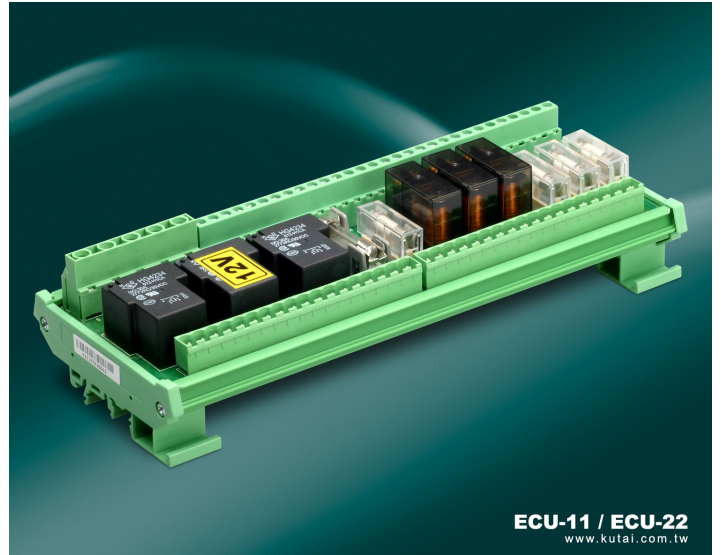

**ECU-11 / ECU-22**  
www.kutai.com.tw

\*1 Harness with plug-in connectors is showed in photo, the available harness length range is from 26cm to 75cm.


**Specifications**

Terminals	Function
J1 , J2	Terminal plugs which connect to ECU-02 by harness sets
TB2 , TB3	Terminal Strips which connect to Gen-set for control and sensing

Fuse	Function	Specifications
F1-F3	AC Input Voltage Protection	20 mm, 2A / AC 250V
F4	ECU-02 DC input Protection	20 mm, 2A / AC 250V
F5	Signal Output Protection	30 mm, 50A / DC 30V

Relay	Function	Specifications
K1	Warm Up Signal	DC 30V / 5 Amp
K2	Stop Signal	DC 30V / 30 Amp
K3	Start Signal	DC 30V / 30 Amp
K4	Auxiliary Signal	DC 30V / 5 Amp
K5	Pre-heat Signal	DC 30V / 30 Amp
K6	Alarm Signal	DC 30V / 5 Amp

**Dimensions**

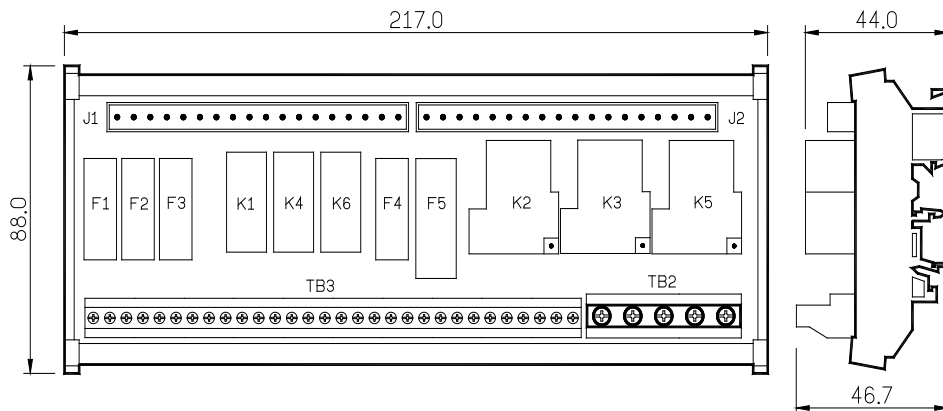

DIN Rail Dimensions: 3.5 x 7.5 mm

