

EV-01

Electronic Voltage Monitor

Voltage 210~290 VAC / 400~560 VAC

Time Delay 1~10 sec.

*All manufacturer names, numbers, symbols and descriptions are used for reference purpose only and do not imply that any part is the product of these manufacturer.

Features

- Power & Over Voltage LED Indicators
- Reset Button / Offer Outer Reset Terminal
- Voltage Monitor & Time Delay Set
- Dry Contact Output
- Operation Voltage 10~28 VDC
- Two-Stage Voltage Range Monitored




Specifications

Power Supply	DC 10~28 VDC Max. 0.3A	Contact Output Capacity	1a , b
Voltage Monitor	Adjustable Range 210~290 / 400~560 VAC (jumper switch) 0.5 VA 40~500 Hz single phase	Output Impedance	10a / 250 VAC PF=1 0~200 Ω
Time Delay	1~10 sec. ±0.5 sec. (Adjustable)	Dimensions	101.0 (L) x 69.0 (W) x 23.5 (H) mm
		Weight	150 g ±2%

Environment

Operation Temperature	-40~65 °C	Storage Temperature	-65~85 °C
------------------------------	-----------	----------------------------	-----------

Mechanical Specifications (Unit : mm)

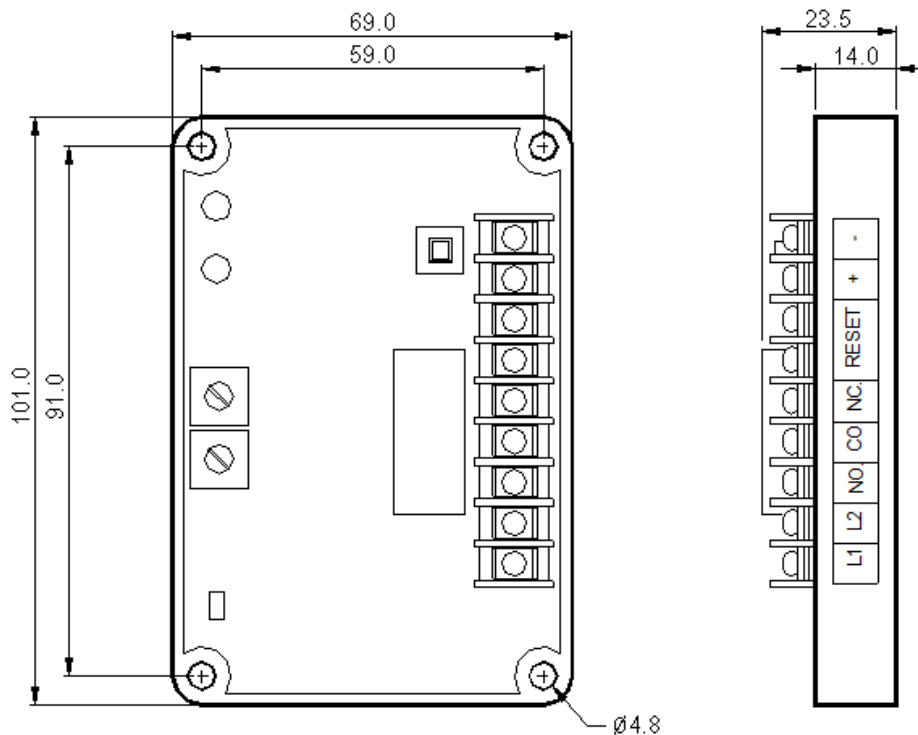

固也泰電子工業有限公司
KUTAI ELECTRONICS INDUSTRY CO., LTD.



TEL: +886-7-8121771 FAX: +886-7-8121775

Head Office: No.3, Lane 201, Chien Fu St., Chyan Jenn Dist., Kaohsiung, TAIWAN
Please link to <http://www.kutai.com.tw> for detailed manual.