

# ATSC403B

## PTS Dedicated Remote Operator Display Module

The ATSC403B can be installed on the cabinet panel. This allows users to operate the system, monitor the real-time status of the ATS, and configure parameters directly from outside the cabinet without opening the door, significantly enhancing operational convenience and safety.



### Features

- Connected to the PTS controller via two USB Type-C cables
- Microcontroller-based program control with IP65 Rating dust tight and against low-pressure water jets.
- Equipped with a 3.5-inch color LCD, synchronized with the PTS controller
- Multi-function rotary knob; all settings can be operated directly from the panel
- Panel mounting design for convenient direct operation and monitoring outside the enclosure.
- Supports numerical and analog meter display for convenient real-time power value measurement.
- Multilingual interface options: Traditional Chinese, English, Japanese, and Spanish
- All fault messages are accompanied by an audible alarm to alert the user.
- Built-in radar sensing function: when the device is in sleep mode, it automatically detects approaching users and wakes the screen instantly.

※ For operation of this display module, please refer to the [PTS-400 User Manual](#)

### Specifications

<b>Operating Voltage</b>	5Vdc
<b>Static Power Consumption</b>	Less than 0.8W
<b>Display Resolution</b>	480 x 320 pixel

### Environment

<b>Operating Temperature</b>	-20 to +50 °C
<b>Storage Temperature</b>	-30 to +80 °C
<b>Relative Humidity</b>	90% max.

### Standard Accessories

<b>Retaining Clips</b>	2 pcs
------------------------	-------

### Physical Specifications

<b>Dimensions</b>	112.0 (L) x 176.0 (W) x 34.7 (H) mm 4.41 (L) x 6.93 (W) x 1.37 (H) inch
-------------------	--

### Optional Accessories

<b>HU-100-TYPEC</b>	1000mm USB Type-C Cable
<b>HU-200-TYPEC</b>	2000mm USB Type-C Cable

<b>Cut-out Dimensions</b>	160.0 x 96.0 +/- 0.5 mm 6.22 x 3.78 +/- 0.02 inch
---------------------------	--


### Relative Product

[Programmable Automatic Transfer Switch \(ATS\)](#)

### Weight

320 g +/- 2%
0.71 lb +/- 2%

### Dimensions

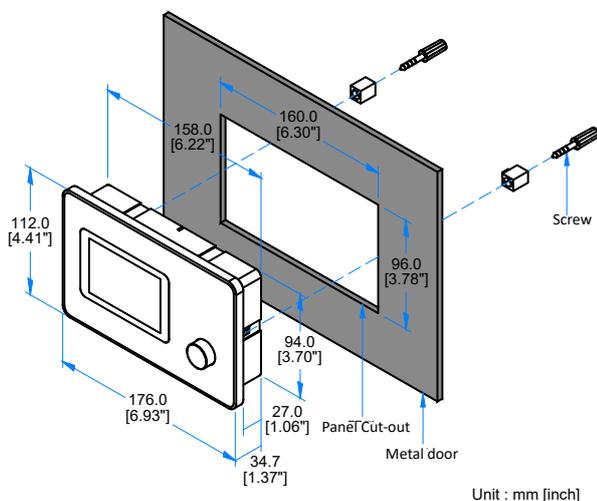

### Installation Instructions

