

EV-01

Electronic Voltage Monitor

Voltage 210 to 290 Vac / 400 to 560 Vac

Time Delay 1 to 10 seconds

Features


- Power & over voltage LED indicators
- Reset button / offer outer reset terminal
- Voltage monitor & time delay set
- Dry contact output
- Operation voltage 10 to 28 Vdc
- Two-stage voltage range monitored



Specifications

Power Supply	DC 10 to 28 Vdc Max. 0.3A	Time Delay	1 to 10 seconds +/-0.5 second (adjustable)
Voltage Monitor	Adjustable range 210 to 290 Vac / 400 to 560 Vac (Jumper switch) 0.5 VA	Output Impedance	0 to 200 ohms
	Frequency 40 to 500 Hz 1 phase	Contact Output Capacity	1a , b 10a / 250 Vac PF=1

Dimensions

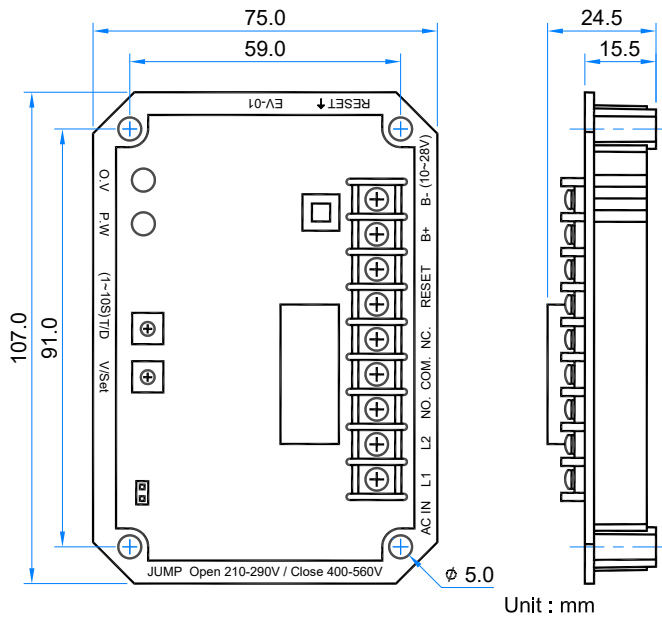

Environment

Operating Temperature	-40 to +60 °C
Storage Temperature	-65 to +85 °C

Physical Specifications

Dimensions	107.0 (L) x 75.0 (W) x 24.5 (H) mm
Weight	150 g +/-2%

