

KCU-01/KCU-02/KCU-03

USB / RS-485 / Ethernet Communication Modules

Specifications

Power Input	5 Vdc
Power Consumption	Less than 1.0 watt
Operating Temperature	-20 to +70 °C
Relative Humidity	Max. 95%
Dimensions	KCU-01 65.0 (L) x 23.0 (W) x 39.0 (H) mm KCU-02 65.0 (L) x 23.0 (W) x 56.0 (H) mm KCU-03 65.0 (L) x 23.0 (W) x 39.0 (H) mm
Weight	KCU-01 27.6 g +/-2% KCU-02 27.8 g +/-2% KCU-03 31.0 g +/-2%




Features

KCU-01 USB Remote Communication Module


- Friendly software Interface, for configuration and monitoring
- Support USB Modem for remote communication
- Support mini USB/5P B-type cable
- Equipped with LED status indicator

Dimensions

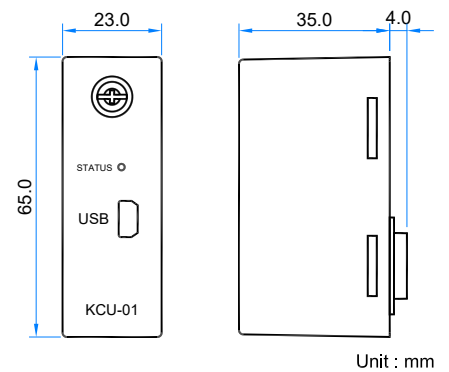

KCU-02 RS-485 Remote Communication Module

- Friendly software Interface, for configuration and monitoring
- Working under Half-Duplex mode
- Automatic configuration of RS485 Address and Baud Rate
- Equipped with LED status indicator

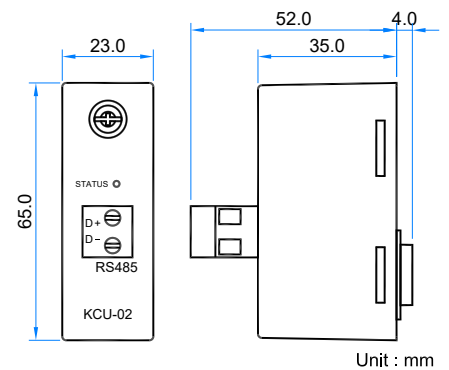

KCU-03 Ethernet Remote Communication Module

- Friendly software Interface, for configuration and monitoring
- All transfer data with encrypted and decrypted protection
- System automatically disconnect after 3 failure registry logins
- System automatically disconnect if data packet is not correctly received within 5 second after registry login
- Server Device, supports maximum of 4 users to simultaneously login
- Security password to enable controller system parameter configuration
- Equipped with LED status indicator
- Support 10-Base-T network transmission

