

# KCU-05

## RS-485 Modbus Communication Modules

### Features

- Supports Modbus RTU serial communication
- Slave Addresses for devices connected on the same RS485-Modbus network can be set from 1 to 99
- Automatically reads device setting values and sets the addresses and transmission speed (baud rate) in the Modbus communication protocol
- Equipped with LED status indicator




### Specifications

<b>Power Input</b>	5 Vdc
<b>Power Consumption</b>	Less than 1.0 watt

### Environment

<b>Operating Temperature</b>	-20 to +70 °C
<b>Relative Humidity</b>	Max. 95%

### Dimensions

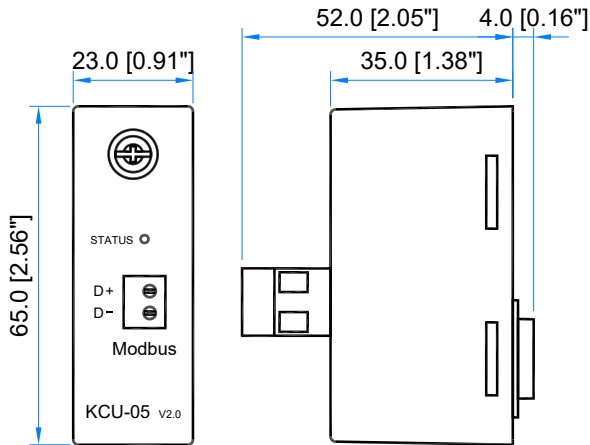

Unit : mm [inch]

### Physical Specifications

<b>Dimensions</b>	65.0 (L) x 23.0 (W) x 56.0 (H) mm
<b>Weight</b>	50.4 g +/-2%

### Compatible Controllers

[BTB Type ATS](#)

[GCU-4K](#)

[GCU-5K](#)