

KCU-30

Ethernet Remote Communication Module

Features

- Using PC, tablet, or smartphone to monitor & control
- Design for certain KUTAI ATS and Generator Controllers
- Plug and Play Internet connection
- Support Dynamic IP Connection
- Status Indication LED
- Transmitted data encrypted with Primary/Session key
- Administrator Password for monitoring and controlling (1 user only)
- Viewer Password for monitoring only (Up to 5 users)
- Support 10Base-T standard




Specifications

Power Input	5 Vdc
Power Consumption	Less than 1.0 watt

Environment

Operating Temperature	-20 to +70 °C
Storage Temperature	-35 to +85 °C
Relative Humidity	Max. 95%
Vibration	3.0 Gs @ 100 to 2K Hz

Dimensions

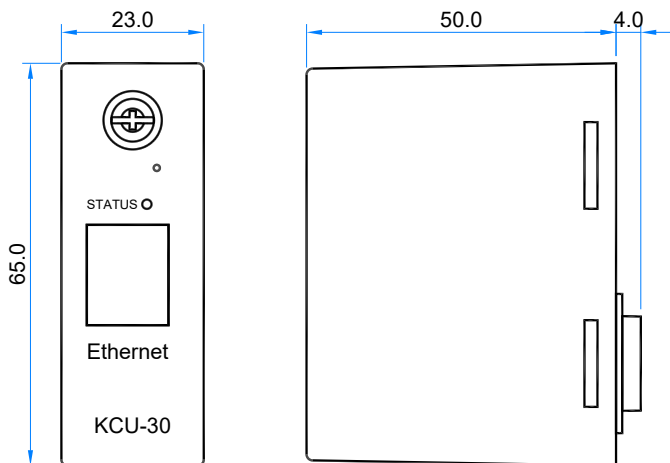

Unit : mm

Physical Specifications

Dimensions	65.0 (L) x 23.0 (W) x 54.0 (H) mm
Weight	31.0 g +/-2%

