

KCU-31

Ethernet Remote Communication Module

Features

- Remote monitor and control through PC, Tablet or Smartphone by using Monitoring Software
- Design for KUTAI [BTB Type ATS](#) and specific Generator Controllers
- Plug and Play Internet connection
- Support Dynamic IP Connection
- Status Indication LED
- Transmitted data encrypted with Primary/Session key
- 1 Administrator and up to 7 viewer
- Support 10Base-T standard
- Free GenOnCall® App available for iOS and Android




Specifications

Power Input	5 Vdc
Power Consumption	Less than 1.0 watt

Environment

Operating Temperature	-20 to +70 °C
Storage Temperature	-35 to +85 °C
Relative Humidity	Max. 95%
Vibration	3.0 Gs @ 100 to 2K Hz

Dimensions

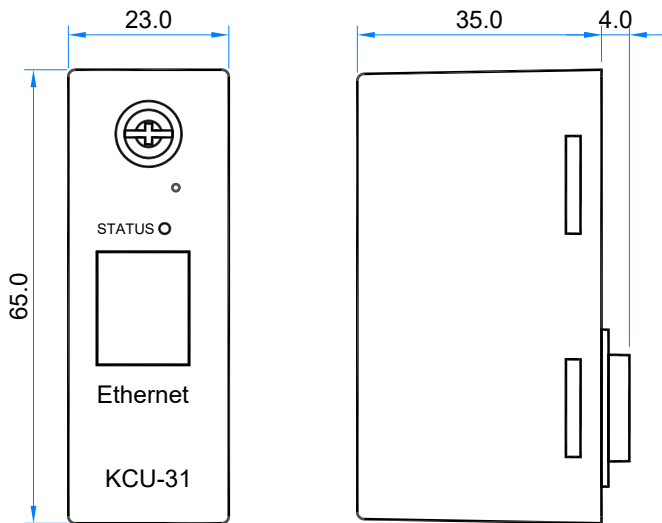

Unit : mm

Physical Specifications

Dimensions	65.0 (L) x 23.0 (W) x 39.0 (H) mm 2.6 (L) x 0.9 (W) x 1.5 (H) inch
Weight	31.0 g +/-2% 0.068 lb +/-2%

Compatible Controllers

- [BTB Type ATS](#) (must use with [KCU-IF](#))
- [GCU-5K](#)