

KCU-70

Modbus TCP/IP Remote Communication Module

Features

- Support manual setting or automatic acquisition of IP network connection
- Number of connections: 3
- Support 10/100 Base-T network transmission (IPv4)
- IP Port : 502 (Factory preset)
- Status Indication LEDs



Specifications

| | |
|---------------------------------|--------------------|
| Power Input | 5 Vdc |
| Static Power Dissipation | Less than 1.0 watt |


Environment

| | |
|------------------------------|-----------------------|
| Operating Temperature | -20 to +70 °C |
| Storage Temperature | -35 to +85 °C |
| Relative Humidity | Max. 95% |
| Vibration | 3.0 Gs @ 100 to 2K Hz |

Compatible Controllers

| Control Unit | Firmware Version Request | Control Unit | Firmware Version Request |
|-------------------------|--------------------------|--------------------------|--------------------------|
| ATS-245-DC | Vr 18.04 or above | ATS-342 | Vr 01.04 or above |
| ATS-245 | Vr 29.04 or above | ATS-PLC | Vr 07.03 or above |
| ATS-22A-DC | Vr 32.04 or above | AMF-10 | Vr 01.03 or above |
| ATS-245AG | Vr 20.05 or above | AMF-11 | Vr 01.03 or above |
| ATS-385 | Vr 23.04 or above | GCU-100 | Vr 01.05 or above |
| ATS-465 | Vr 26.03 or above | GCU-3000 | Vr 01.07 or above |
| ATS-332 | Vr 01.05 or above | | |

Dimensions

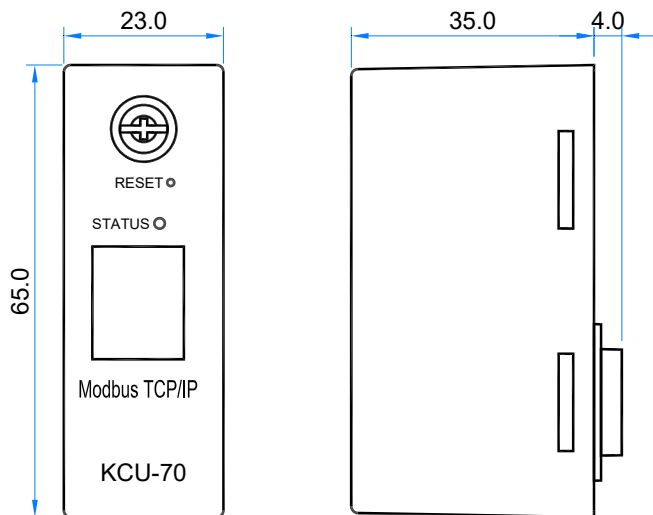

Unit : mm

Physical Specifications

| | |
|-------------------|-----------------------------------|
| Dimensions | 65.0 (L) x 23.0 (W) x 39.0 (H) mm |
| | 2.6 (L) x 0.9 (W) x 1.5 (H) inch |
| Weight | 31.0 g +/-2% |
| | 0.068 lb +/-2% |

