


KCU-IF

Interface for Remote Communication Module


Exclusive accessory for Programmable BTB Type Automatic Transfer Switch (ATS)

Features

- Up to 2 KCU module connection at the same time
- Protection plug to prevent reverse connection

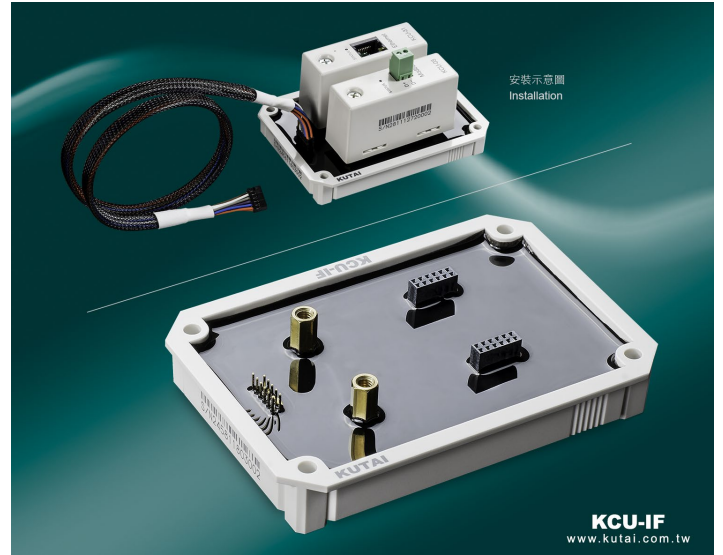

Dimensions

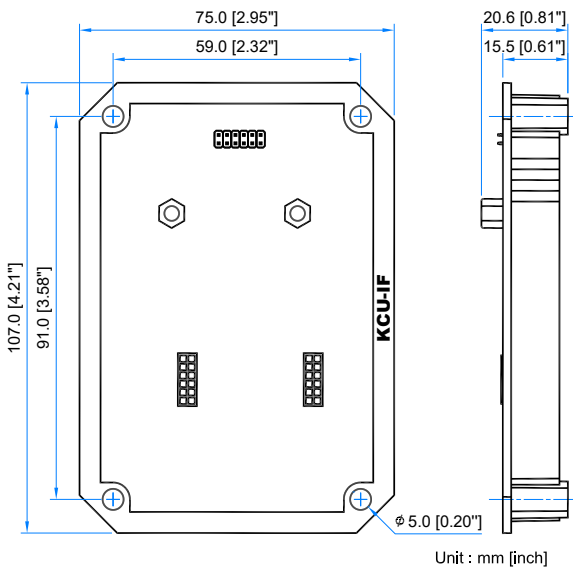

Physical Specifications

Dimensions 107.0 (L) x 75.0 (W) x 20.6 (H) mm
4.21 (L) x 2.95 (W) x 0.81 (H) inch

Weight 188 g +/-2%
0.41 lb +/-2%

Environment

Operating Temperature -40 to +70 °C

Storage Temperature -40 to +85 °C

Relative Humidity Max. 95%

Vibration 5 Gs @ 60 Hz

Accessories

Standard Accessory 500 mm Connection Harness x 1

Optional Accessory 1000 mm Connection Harness

Installation Instructions

