

RA-20

Remote Annunciator Module

Together with GCU-20 Module or other ECU with Annunciator output

Features

- Works up to 1500 meters from the host module using 18 AWG cable (@12/24Vdc)
- Universal LED graphic interface, displays generator status and failures
- Modular design, quick installation
- Circuits are finger safe with UL94-V0 Epoxy protection
- Simplify all wiring with pluggable terminal block
- Easy assembly & maintenance with no chance of wiring mistakes



Panel Display

	<ul style="list-style-type: none"> ● Low Oil Pressure Alarm ● Auxiliary Alarm (Flashing) 		<ul style="list-style-type: none"> ● Wrong speed Alarm ● No Speed Signal Alarm (Flashing)
	<ul style="list-style-type: none"> ● High Water Temperature Alarm 		<ul style="list-style-type: none"> ● Engine Running Indicator ● Engine IDLE Indicator (Flashing)
	<ul style="list-style-type: none"> ● Over Crank Alarm 		<ul style="list-style-type: none"> ● Common Alarm Indicator

Specifications

Rated Input Voltage	9 to 36 Vdc	Terminal Block Capacity	300 Vac / 15A
Working Distance from Host ECU	1500 Meters	Power Consumption	Under 1 watt
Standard Cable	18 AWG		


Environment

Operating Temperature	-20 to +60 °C
Storage Temperature	-35 to +85 °C
Relative Humidity	Max. 90%

Physical Specifications

Dimensions	88.0 (L) x 88.0 (W) x 37.5 (H) mm
Weight	143 g +/-2%

Dimensions

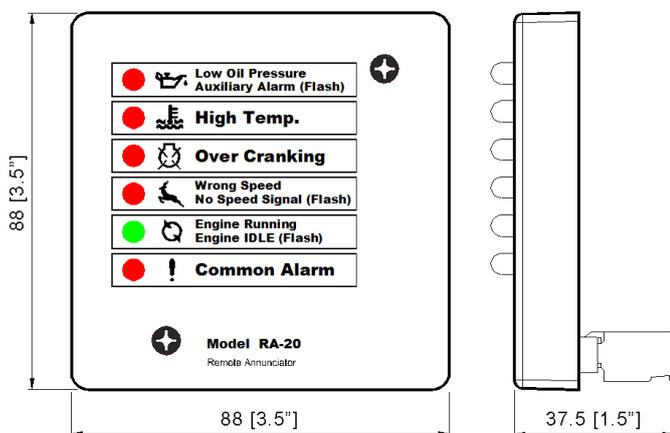

Installing Panel

