

KCU-07

Modbus TCP/IP Remote Communication Module

Features

- KCU-07 Modbus TCP/IP runs on an Ethernet physical layer
- Support manual setting or automatic acquisition of IP network connection
- Number of connections: 3
- Support 10/100 Base-T network transmission
- IP Port : 502 (Factory preset)
- Status Indication LEDs
- Design for KUTAI [BTB Type Automatic transfer Switch \(ATS\)](#) and specific Generator Controllers




Specifications

Power Input	5 Vdc
Power Consumption	Less than 1.0 watt

Environment

Operating Temperature	-20 to +70 °C
Storage Temperature	-35 to +85 °C
Relative Humidity	Max. 95%
Vibration	3.0 Gs @ 100 to 2K Hz

Dimensions

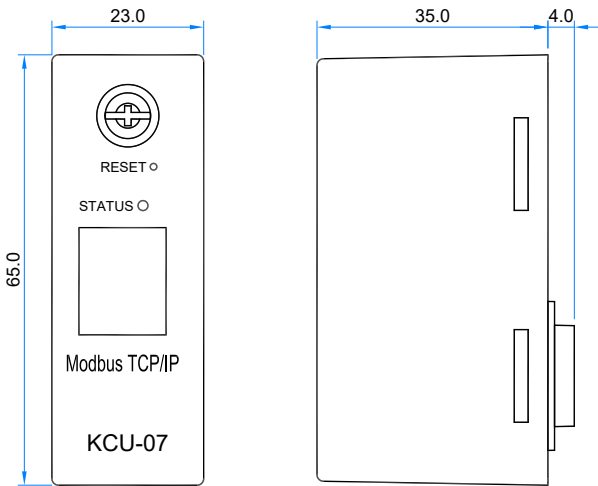

Unit : mm

Physical Specifications

Dimensions	65.0 (L) x 23.0 (W) x 39.0 (H) mm 2.6 (L) x 0.9 (W) x 1.5 (H) inch
Weight	31.0 g +/-2% 0.068 lb +/-2%

Compatible Controllers

- [BTB Type ATS](#) (must use with [KCU-IF](#))
- [GCU-4K](#)
- [GCU-5K](#)

