

AMF-10R

AMF Controller Interface Module


With Pluggable Terminal Block to AMF *1 Controller & BTS *2

*1 AMF: Automatic Mains Failure

*2 BTS: Basic Transfer Switch

Features

- For use in Electrical Operation and Mechanical Maintenance Transfer Switch connecting to Assorted Brand AMF Controller Available on the Market
- Simplify All Wiring with Pluggable Terminal Block
- Easy Assembly & Maintenance with No Chance of Wiring Mistakes
- Circuits are Finger Safe with UL94-V0 Epoxy Protection
- Built-In 3 Phase Fuses to Protect Mains & Generator Circuits
- Built-In Adjustable Transfer Delay Time for Mains and Generator (10 to 15 seconds)

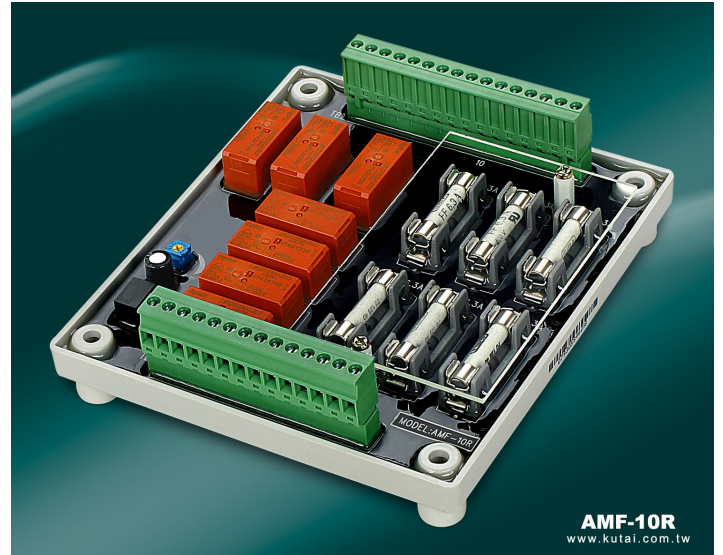


Specifications

Item	Function	Current	Fuse Capacity
F1	Protect Normal Power Circuit	6.3A	50 KA @ 500 Vac
F2	Protect Normal Power Circuit	6.3A	50 KA @ 500 Vac
F3	Protect Normal Power Circuit	6.3A	50 KA @ 500 Vac
F4	Protect Emergency Power Circuit	6.3A	50 KA @ 500 Vac
F5	Protect Emergency Power Circuit	6.3A	50 KA @ 500 Vac
F6	Protect Emergency Power Circuit	6.3A	50 KA @ 500 Vac

Item	Function	Capacity
TB1	Connect to Transfer Switch	300 Vac / 15A
TB2	Connect to AMF Controller	300 Vac / 15A
Mains "ON"	Transfer from Generator to Mains	250 Vac / 7A
Generator "ON"	Transfer from Mains to Generator	250 Vac / 7A

Dimensions

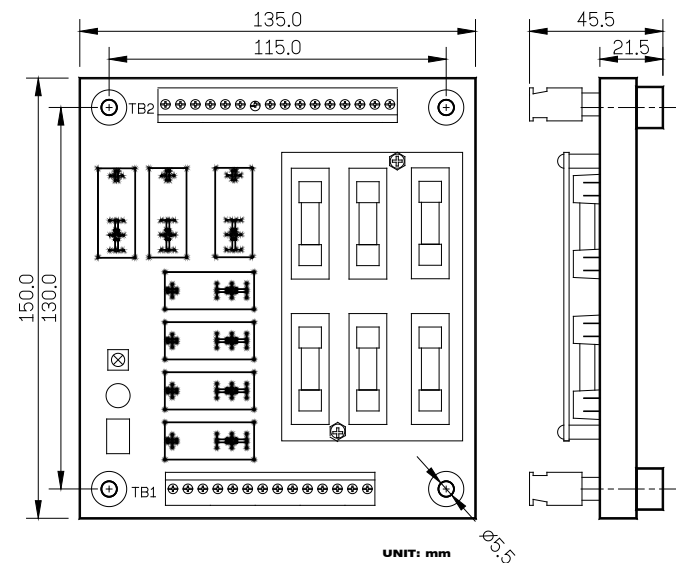

Physical Specifications

Dimensions	150.0 (L) x 135.0 (W) x 45.5 (H) mm
Weight	260 g +/-2%



KUTAI ELECTRONICS INDUSTRY CO., LTD.

TEL : +886-7-8121771 FAX : +886-7-8121775 Website : www.kutai.com.tw
Headquarters : No.3, Ln. 201, Qianfu St., Qianzhen Dist., Kaohsiung City 80664, Taiwan

ISO 9001
ETC